


WideTEK WT36-200



Scanning Speed

The scanning speed depends on the resolution alone. The WideTEK scanners always scan in full color, even if bitonal image output is selected. This produces the best possible images.




The following table shows the scan speed depending on the resolution for two versions of the scanner. The chassis B is the current production model, the chassis C will have an enhanced camera system as well as a faster processor.

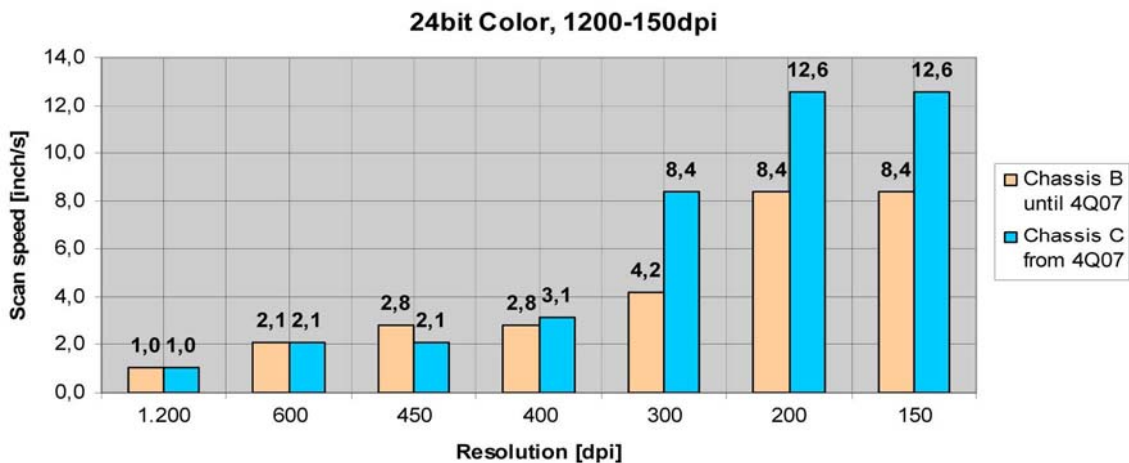

Relation between Documents Length and Resolution

The maximum document length depends on three factors:

Resolution, color depths and document width. The following tables show their relationship:

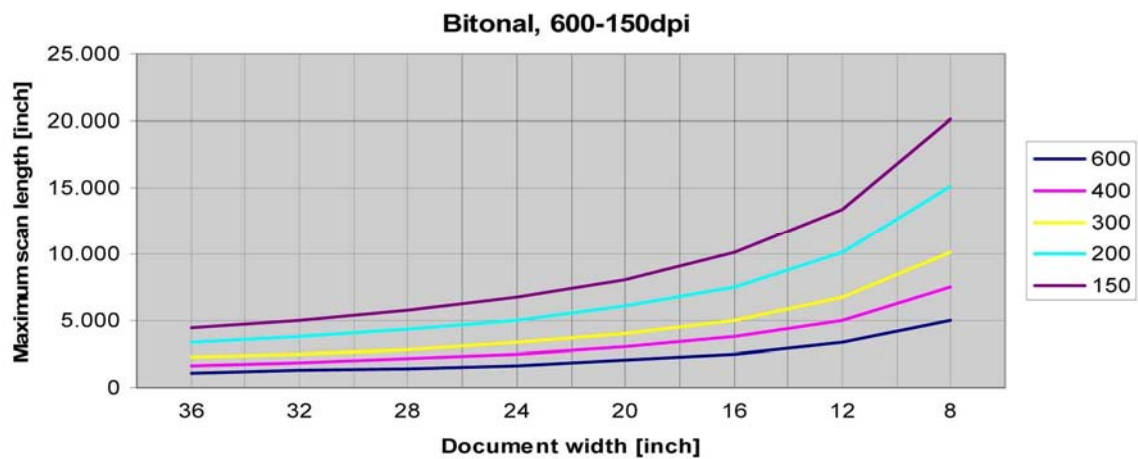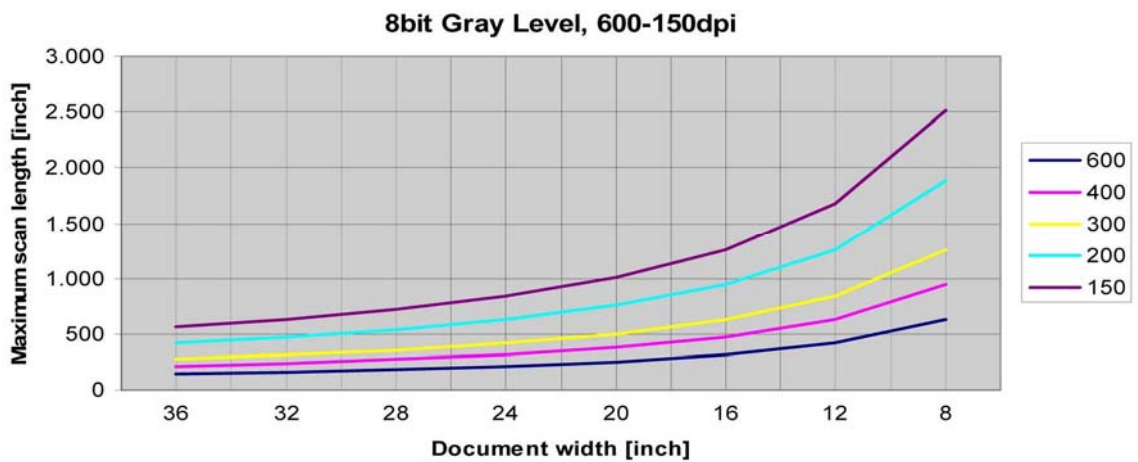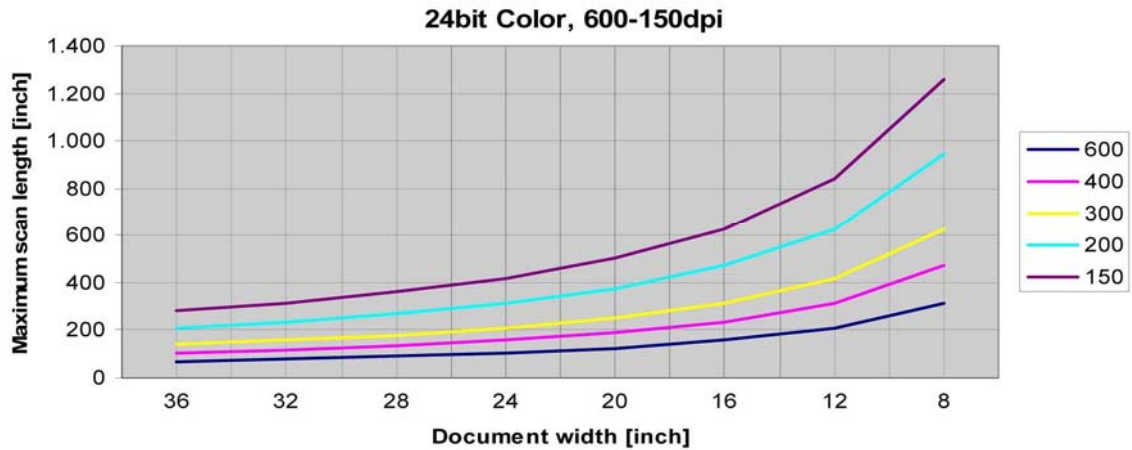

Optical System

Maximum Document Width:	38 inches / 965 mm
Scan Width:	Max. 36 inches / 915 mm
Optical Resolution:	600 dpi camera, 1200 dpi transport
Sensor Type:	3x Tri-Color CCD, encapsulated and dust-proof
	12 bit gray scale (internal resolution)
	36 bit color (internal resolution)
Sensor Resolution:	68.400 pixels (3 * 22.800)
Scan Modes:	1bit Black/White
	8bit Gray scale,
	24 bit Color, 8bit indexed

Accuracy and Stitching

Stitching Target:	Permanently built-in
Stitching Interval:	One measurement per minute minimum
Warm up time:	None
Accuracy in Scan Direction :	± 0.08% across 36 inch scanning width.
Accuracy in Transport Direction	± 0.08% with new transport rollers

Illumination System

Light Source:	Two linear lamps with 130 white LEDs each
Warm-up Time:	None. Max. brightness immediately after switch-on.
Temperature Dependency	None
UV / IR Emission:	None
Lamp Life Time:	50.000 hours scanning time

Electrical Specifications

This device is Energy Star compliant.



Voltage	100–240V AC
Frequency	50/60 Hz

Power Consumption

Stand-by	0.1 W
Start Procedure	190 W
Ready to scan, lamps off	115 W
Scanning	190 W

Mechanical Dimensions

Scanner outer dimensions	220 x 1094 x 555 mm (H x W x D) 8.7 x 43 x 21.9 inches
Scanner outer dimensions (incl. floor stand)	1070 x 1094 x 555 mm (H x W x D) 42.2 x 43 x 21.9 inches
Weight of Scanner	45,6 kg
Weight of Floor Stand / incl. Paper Output Tray	17,5 kg / 19,7 kg

Wood Transport Box:

Weight of Transport Box	26 kg
Dimension of Transport Box:	540 x 1300 x 745 mm (H x W x D)
Total shipping weight	96 kg

Documents Specification

Document Size:	915 mm, 36 inches wide, up to 500 m, 20.000 inches long
Document Weight:	Any. Straight paper path can handle the stiffest documents
Document Thickness:	2.5 mm, 0.1 inch maximum.

Ambient Conditions

Operating Temperature	+5 to +40 °C
Storage Temperature	0 to +60 °C
Relative Humidity	20 to 80% (non-condensing)
Noise Level	< 35 dB(A) (Operating) < 25 dB(A) (Stand-by)

© 2007 – 2010 by Image Access GmbH, Wuppertal, Germany.

Printed in Germany. All rights reserved.

Reproduction in whole or in part in any form or medium without express written permission of Image Access is prohibited. Scan2Net® is a registered trademark of Image Access. Other designated brands herein are trademarks of Image Access.

All other trademarks are the property of their respective owners.

Image Access reserves the right to change the described products, the specifications or documents at any time without prior notice. For the most recent version, always check our web site www.imageaccess.de or the customer service portal at <http://service.imageaccess.de>